

Part Number:TD26FF22G-5.7MM

0.35mm[0.014inch] test pitch



Probe Specifications

Minimum Center:	0.35mm[0.014inch]
Full Stroke:	1.0mm[0.39inch]
Recommended Stroke:	0.65mm[0.026inch]
Spring Force:	22g[0.776oz]
Impedance:	<50milliohms
Current:	1Amp
Temperature:	0°C to 140°C [32°F to 284°F]
Spring Life:	200K cycles
Diameter Tolerance:	±0.01mm[±0.39mil]
Length Tolerance:	±0.10mm[±3.93mil]
Straightness Tolerance:	0.05mm[±1.97mil]

Materials Specifications

Plunger:	SK-4, BeCu, Au plating treatment
Spring:	Music wire, Au plating treatment
Barrel:	Phosphor Copper, Au plating treatment

Spring Force

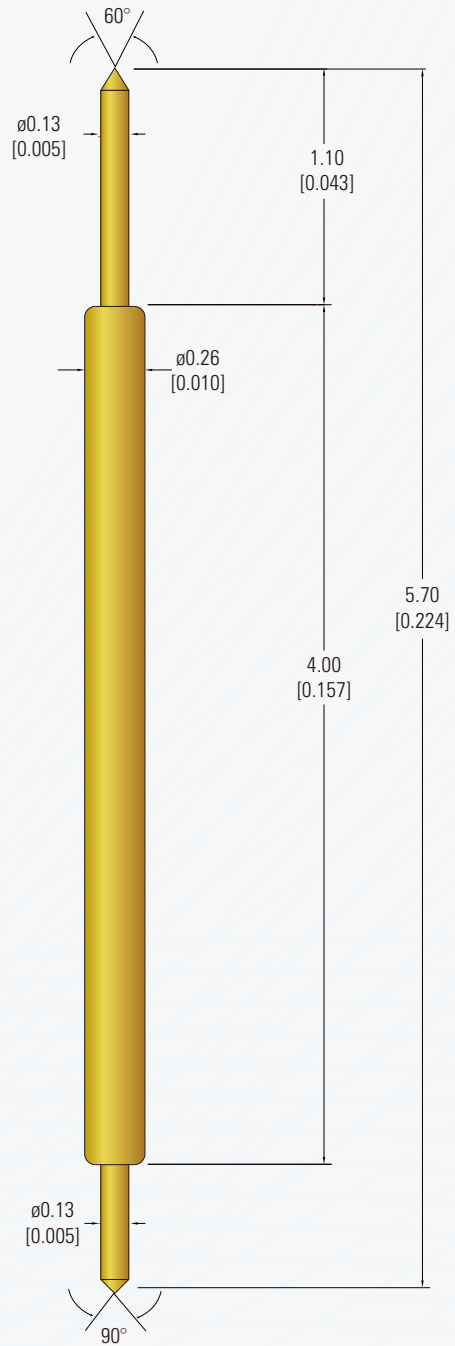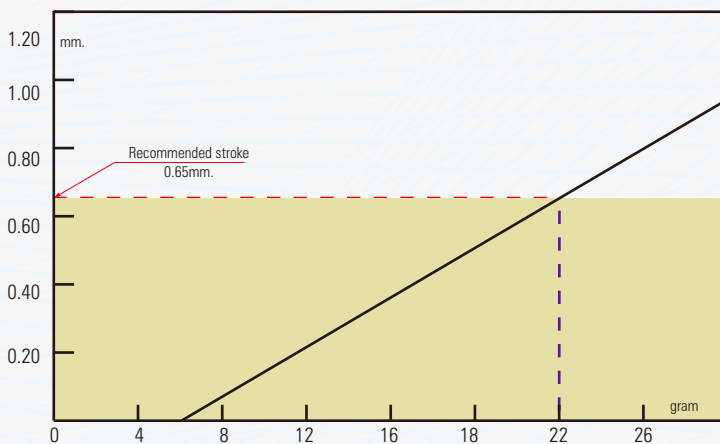

Probe mm.[inch]

ICT FCT Probes
 PCB Probes
 High Current Probes
 Battery Probes
 High Frequency
 Switch Probes
 Automotive Probes
 Semiconductor Probes